
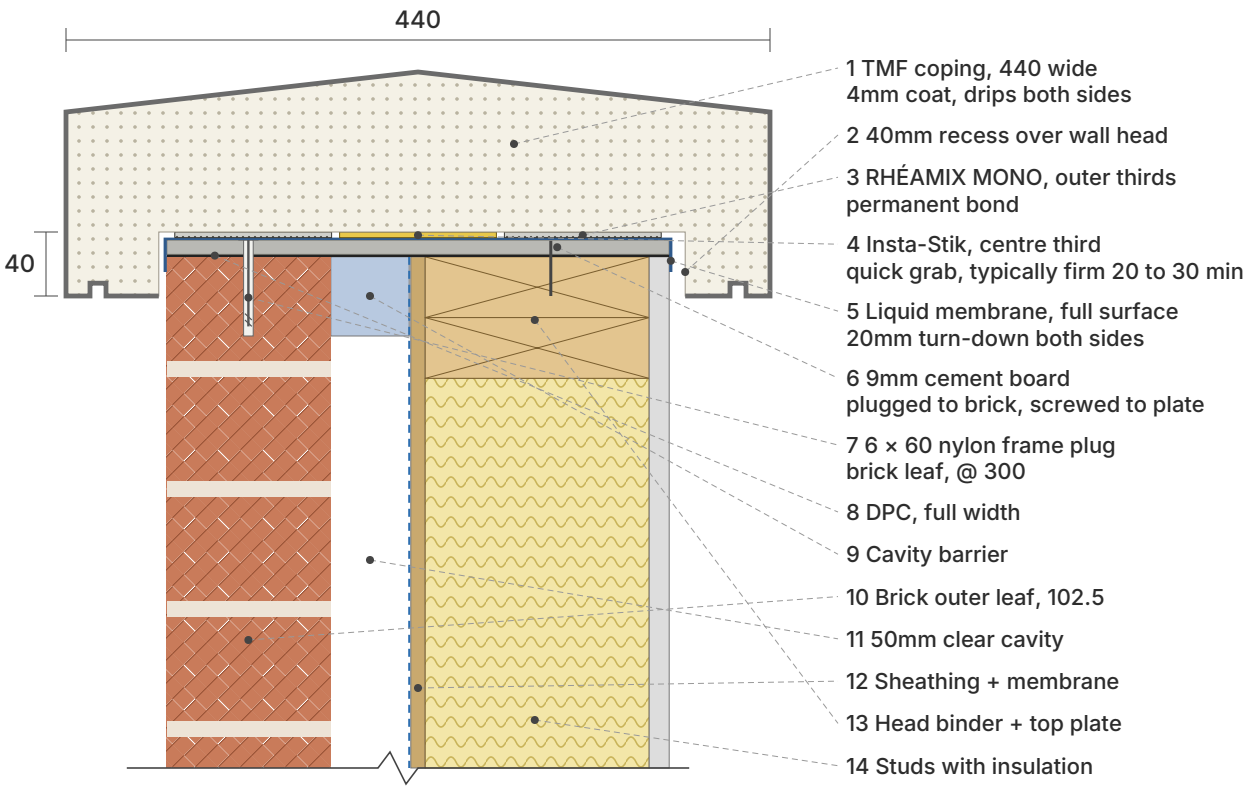


TMF-SD-001A Coping on cavity wall, brick / timber frame

Option A: adhesive bonded | Build-up 1 | Rev L

Taylormade Facades Ltd | Dimensions in mm | Do not scale

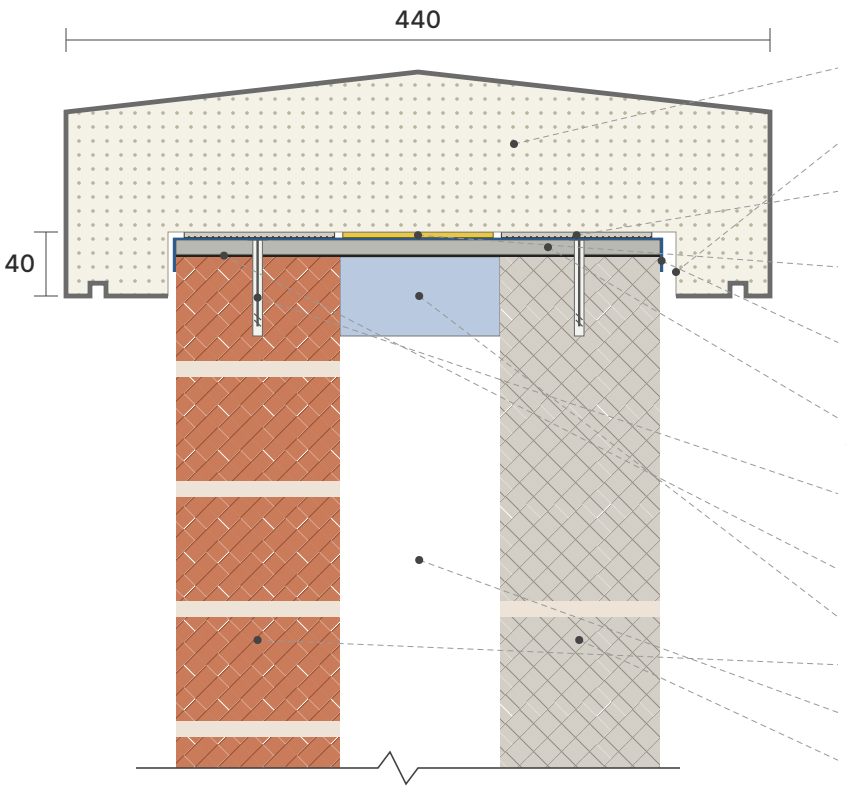

1 TMF coping, 440 wide
4mm coat, drips both sides

2 40mm recess over wall head

3 RHÉAMIX MONO, outer thirds
permanent bond

4 Insta-Stik, centre third
quick grab, typically firm 20 to 30 min

5 Liquid membrane, full surface
20mm turn-down both sides

6 9mm cement board
fixed with frame plugs

7 6 × 60 nylon frame plug
hammer-in, collared, @ 300

8 DPC, full width

9 Cavity closer

10 Brick outer leaf, 102.5


11 100mm cavity

12 100mm block inner leaf

TMF-SD-001A Coping on cavity wall, brick / block

Option A: adhesive bonded | Build-up 2 | Rev L

Taylormade Facades Ltd | Dimensions in mm | Do not scale

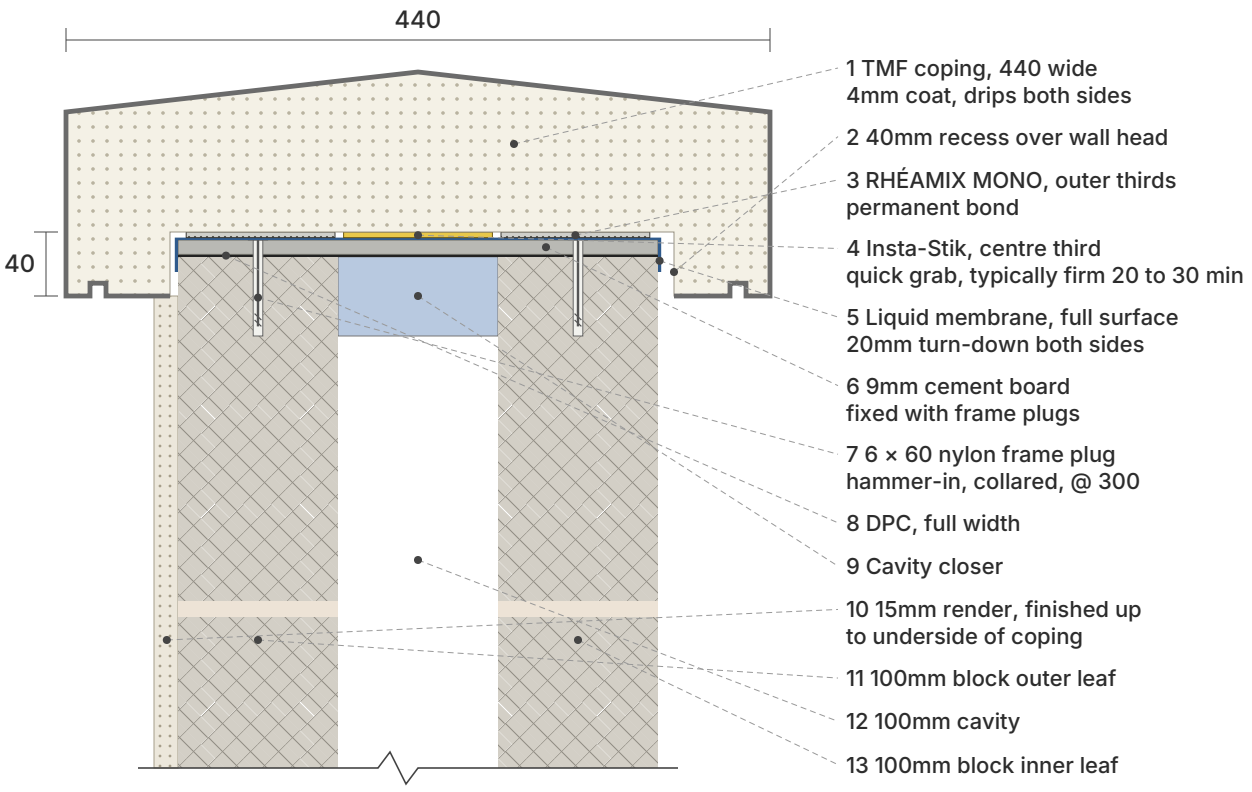

TMF-SD-001A Coping on cavity wall, rendered block / block

Option A: adhesive bonded | Build-up 3 | Rev L

Taylormade Facades Ltd | Dimensions in mm | Do not scale