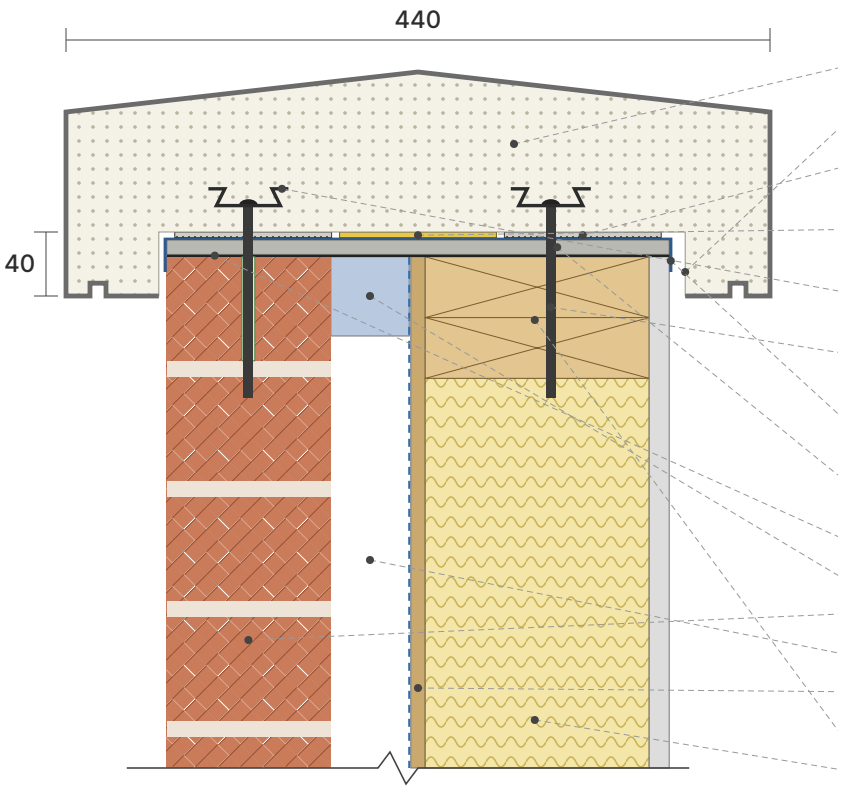


1 TMF coping, 440 wide
4mm coat, drips both sides

2 40mm recess over wall head

3 RHÉAMIX MONO, outer thirds
permanent bond

4 Insta-Stik, centre third
quick grab, typically firm 20 to 30 min

5 Galvanised steel dovetail rail
50 × 10.5, 700 long, in hot-wire cut slot

6 Rail fixing at joint
plugged to brick, screwed to plate

7 Liquid membrane, full surface
20mm turn-down both sides

8 9mm cement board
plugged to brick, screwed to plate

9 DPC, full width

10 Cavity barrier

11 Brick outer leaf, 102.5

12 50mm clear cavity

13 Sheathing + membrane


14 Head binder + top plate

15 Studs with insulation

TMF-SD-001B Coping on cavity wall, brick / timber frame

Option B: concealed mechanical fix (section at coping joint) | Build-up 1 | Rev C

Taylormade Facades Ltd | Dimensions in mm | Do not scale

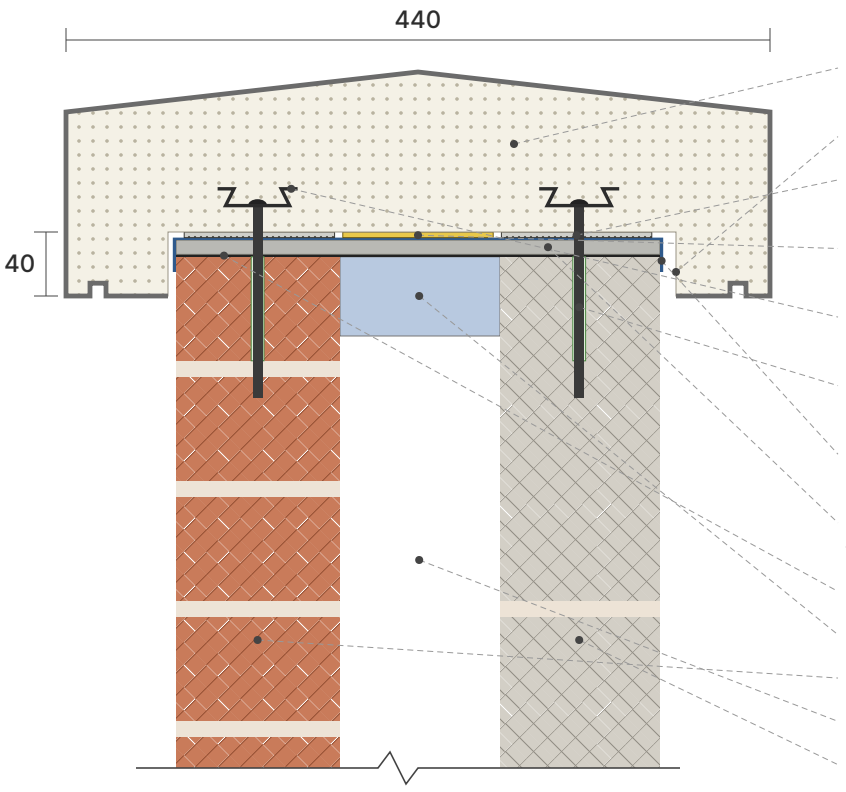

1 TMF coping, 440 wide
4mm coat, drips both sides

2 40mm recess over wall head

3 RHÉAMIX MONO, outer thirds
permanent bond

4 Insta-Stik, centre third
quick grab, typically firm 20 to 30 min

5 Galvanised steel dovetail rail
50 × 10.5, 700 long, in hot-wire cut slot

6 Rail fixing at joint
6 × 120 screw + 8 × 65 plug

7 Liquid membrane, full surface
20mm turn-down both sides

8 9mm cement board
fixed with frame plugs

9 DPC, full width

10 Cavity closer

11 Brick outer leaf, 102.5


12 100mm cavity

13 100mm block inner leaf

TMF-SD-001B Coping on cavity wall, brick / block

Option B: concealed mechanical fix (section at coping joint) | Build-up 2 | Rev C

Taylormade Facades Ltd | Dimensions in mm | Do not scale

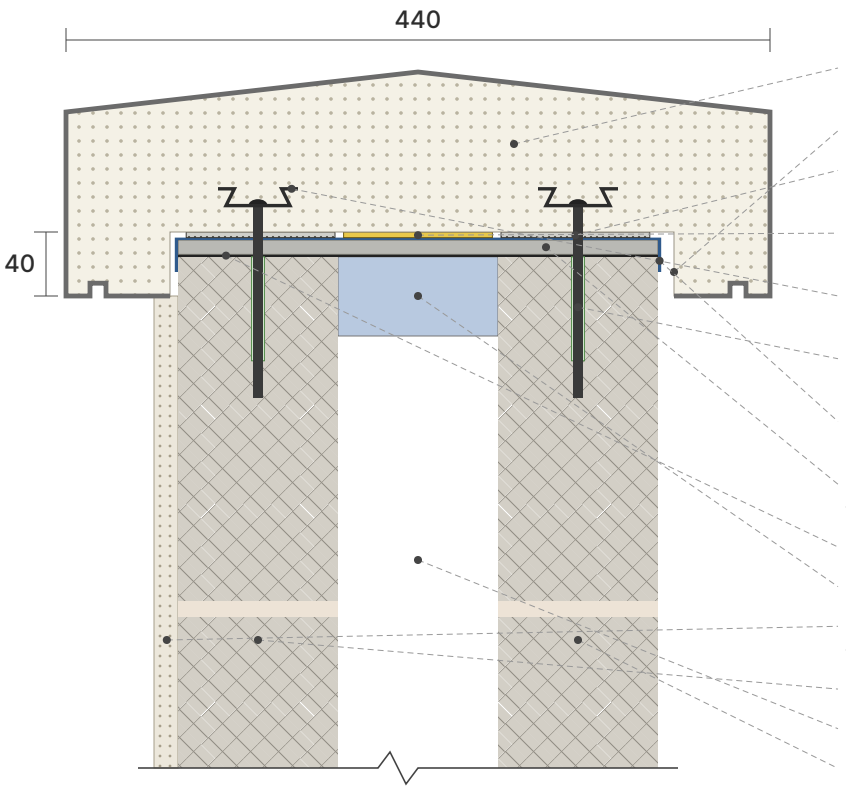

1 TMF coping, 440 wide
4mm coat, drips both sides

2 40mm recess over wall head

3 RHÉAMIX MONO, outer thirds
permanent bond

4 Insta-Stik, centre third
quick grab, typically firm 20 to 30 min

5 Galvanised steel dovetail rail
50 × 10.5, 700 long, in hot-wire cut slot

6 Rail fixing at joint
6 × 120 screw + 8 × 65 plug

7 Liquid membrane, full surface
20mm turn-down both sides

8 9mm cement board
fixed with frame plugs

9 DPC, full width

10 Cavity closer

11 15mm render, finished up
to underside of coping

12 100mm block outer leaf

13 100mm cavity

14 100mm block inner leaf

TMF-SD-001B Coping on cavity wall, rendered block / block

Option B: concealed mechanical fix (section at coping joint) | Build-up 3 | Rev C

Taylormade Facades Ltd | Dimensions in mm | Do not scale